

ATLAS VANDAL RESISTANT SOLAR SHELTER LIGHT



Features

The Atlas vandal resistant Solar Shelter Light is designed to replace or provide reliable “mains power free” solar lighting for BBQ areas, bus shelters, amenities block's, covered walkways, pedestrian tunnels or park and garden shelters. The exterior unit is manufactured from 4mm wall, 316 marine grade stainless steel and 6mm SLX Lexan (polycarbonate) lens making it ideal for vandal prone locations. All exposed fixings are 316 grade stainless steel tamper proof fixings. The rubber mounted toughened glass laminated solar panel is linked to the solar light head using waterproof connectors in such a way that ensures no wiring is exposed.

- Vandal resistant design and manufacture
- 4mm wall 316/304 grade stainless steel casing with SLX lexan screen
- Stainless steel tamperproof fixings
- 30% to 100% radar sensor operated lighting
- Oversize solar panel ensures fast recharge
- Ridgid or flexible solar panel options
- Concealed ceiling mounts
- Wide light distribution pattern
- Premium LiFePo4 battery
- 10 metre connecting cable
- Automatic dusk to dawn lighting
- 3 year warranty for faulty workmanship or component failure not influenced by external means




| | |
|------------------|---------|
| Luminaire Height | 2 - 5 m |
| Lumen Output | 500Lm |
| LED Output | 5W |

VANDAL RESISTANT SOLAR SHELTER SPECIFICATION



Stainless steel tamper proof fixings

6mm SLX Lexan

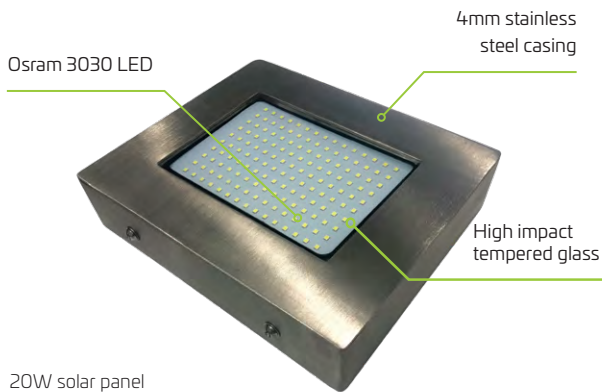

Osram 3030 LED

4mm stainless steel casing

High impact tempered glass

20W solar panel



Optional flexible solar panel to match roof profile

Applications

BBQ areas, Bus shelters, Amenities block's, Park shelters

Technical Data

| | |
|------------------------------|-------------------------------|
| Solar Panel Wattage | 20W |
| LED Output | 5W |
| Lumen Output | 500 lm |
| Battery Type | LiFePO4 |
| Battery Specifications | 8AH 3.7V (29.6Wh) |
| Autonomy | > 7 nights |
| Correlated Colour Temp (CCT) | 5700K |
| Fixture Size | 234 x 196 x 58mm |
| Light Source | Osram 3030 |
| Recharge | 6 hours |
| Mounting Height | 2 - 5 m |
| Mounting | Ceiling |
| Finish | Stainless steel and SLX Lexan |
| Warranty Period | 3 years |
| SKU | SOLV003 |

Mode of Operation

The 360° radar sensor is activated by movement and acts as a power saving feature. The light will operate at 30% output until the radar is activated where it will operate at 100% until no movement is detected returning to 30% output.

As we continue to improve the products function and/or design specifications and data provided may change without notice. Errors and omissions accepted.